



LR5100 | Pop-up System

LR 5100 opening system is an aluminum, insulated opening door and window system product that provides insulation and sealing in buildings while also providing an aesthetic appearance . LR 5100 opening system is a **Linea Rosa** product, one of the leading brands in **aluminum** systems .

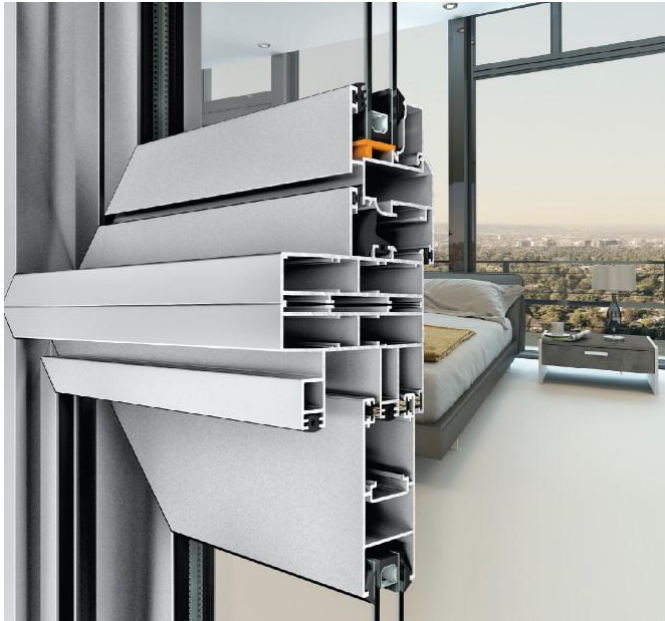

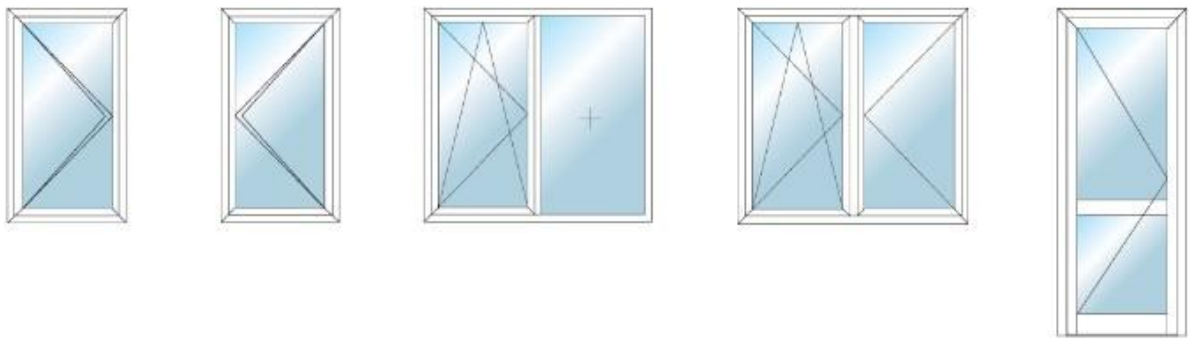

LR-5100 Aluminum Opening System Advantages:

It can offer the most suitable solutions thanks to its wide profile options.

Thanks to the standard aluminum double opening system, it offers the opportunity to apply the **PVC double opening** system.

The combination of the radius heat insulation barrier and the case center gasket provides excellent **sealing and sound insulation**.

Adjustable lock strikers are specially designed

Better thermal insulation values can be achieved thanks to different combinations.

Triple glass and jalousie glass can be applied

Metallic silver and bronze colored **eco surfaces** create a **modern and aesthetic appearance**.

Powder paint and wood appearance options produced in different concepts have been specially designed.

LR-5100 Pop-up System Features
Wing Width : 72 mm
Case Width : 65 mm
Casement Wing Height (min.) : 90 mm
Glass Thickness : 16 – 42 mm
Max. Wing Carrying Capacity : 120 kg ~ 200 kg
Insulation Bridge: 24 mm
Thermal Insulation EN ISO 10077-2: Uf=2.3 W/m2K